

CaviBlaster 0625-G

Gasoline Engine with Manual Start, 6 gpm & 2,500 psi

Specifications and Options


Designed as a dependable & durable, yet lightweight and flexible solution for the low budget cleaning operations, the 0625-G has proven to be a great first step into cavitation

Accessories Included:

Feed Hose (15 feet) with electrical feed pump, Unbalanced Gun,
High Pressure Hose (50 feet)

Optional Accessories:

Additional pressure hose available in 50 ft or 100 ft sections
Max. Pressure hose length recommended up to 300 ft (100 meters) total

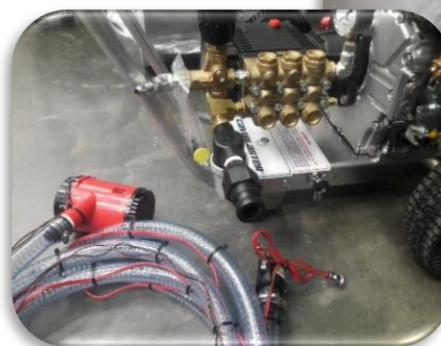

SKID Dimensions

Length w/o handle	27" / 69 cm
Length w handle	33" / 84 cm
Width wheel base	22" / 56 cm
Height	21" / 53 cm
Weight	143 Lbs / 65 Kg

Pump System

Pressure Pump	AR
Pump Material / Type	Brass / Positive Displacement
Flow Rate	5.5 gpm / 21 Lpm
Nozzle Pressure	2,500 psi / 172 Bar
Hose Diam/Max Lgth	3/8" - 300 ft / 100 m

Tools

Tool Type	Unbalanced Gun
-----------	----------------

Drive System

Engine	Gas Honda GX390
Engine Type	4-Stroke
Cooling System	Air
Ignition System	Digital CDI, Variable Timing
Max Output HP/kW	11.7 HP / 8.7 kW
Clutch	Direct Drive
Starting System	Manual / Recoil

Ideal For

Small to Mid size Boat Hulls
Piers, Pilings & Seawalls
Running gear & Out drivers
Pools & Indoor Underwater Instalations

Shipping Dimensions

Pallet 40x48x36"	240 Lbs Gross weight
------------------	----------------------

* Pricing and specifications subject to change without notice

CaviDyne LLC, 5077 Fruitville Rd. Suite - 109-157, Sarasota FL, 34232 USA

Phone: (352)275-5319, sales@cavidyne.com, www.cavidyne.com



CAVIBLASTER™